

## HEALTH AND SAFETY RISKS WITH EPOXY RESIN

### Hazards identification



Human health hazards: Irritating to eyes and skin.  
May cause sensitisation by skin contact.



Environmental hazards: Harmful to aquatic organisms,  
may cause long-term adverse effects in the aquatic  
environment.

- Keep out of the reach of children.
- Avoid contact with skin.
- Wear suitable gloves.
- If swallowed, seek medical advice immediately and show this Manual.
- Work in a well ventilated room.
- Wear a mask, if cutting back, and use water to keep down dust.
- Do not eat, drink or smoke while using the resin.
- Without protection, the resin and hardener may cause sensitisation to the skin and are harmful if inhaled or swallowed.
- The hardener can cause severe burns.
- If in contact with skin, wash immediately with plenty of soap and water.
- In case of contact with eyes, rinse immediately and seek medical advice
- If swallowed, seek medical advice. Do not induce vomiting.

If you require further assistance please contact the technical support team at Baruch Enterprises.

Telephone: +44 (0)20 8803 8899

Fax: +44 (0)20 8803 8939

<http://www.ultramaxbatteries.com>

V1L15

# ULTRAMAX®

## Assembly Instructions for the Universal T-Adapter Connector

1) Please remove the product from the packaging.

This box contains :

a) Universal T-Adapter Connector - (x1)



b) (2x6ml) Dual Cartridge Epoxy Resin (Composition – Epoxy Resin and Hardener) – (x1)




2) Next we need to firmly affix the Universal T- Adapter Connector on to the top surface of the battery. Ensure the surface of the connector & battery is dry & clean, from any dirt or dust.



3) The ideal fixing position for the Universal T-Adapter Connector will be located near the front and on the top surface of the battery. The ring terminals with wires should be able to reach the positive and negative battery terminals, respectively.



4) Once the position has been determined, wear a pair of disposable gloves and mix the two-part epoxy (resin & hardener), using a mixing utensil.

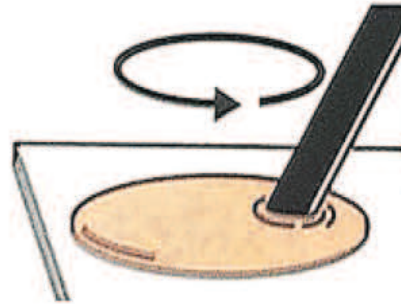


5) Apply the adhesive liberally to the top surface of the battery, in the specified position for the connector.

6) Next place and press the Universal T-Adapter Connector in the specified position. If placed incorrectly the resin will allow approximately 5-10 mins working time.

7) Allow 1-2 hours to cure before rough handling. The resin will achieve its full strength in 24 hours at room temperature.

8) Once fully cured on to the battery. Use the M5 bolts and M5 nuts (supplied with the battery) to assemble the ring terminals to both positive and negative battery terminals.

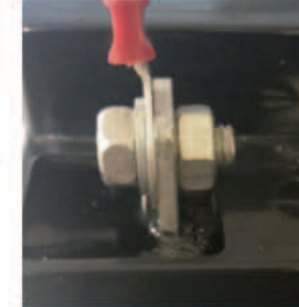

9) The Universal T-Adapter Connector is now securely fixed to the battery. You can fit a T-Adapter to use with your battery.

